

# AQUA COOLER®



GRANITE



WHITE



TITANIUM

# RP SERIES

**POINT-OF-USE  
WATER  
COOLERS  
MAINS CONNECTED**

## MODELS

- RP2 - COOK & COLD
  - RP2G - COOK & COLD, GRANITE
  - RP3 - HOT & COLD
  - RP3G - HOT & COLD, GRANITE
  - RP2T - COOK & COLD TITANIUM
  - RP3T - HOT & COLD TITANIUM
- FILTERED UNITS AVAILABLE

## FEATURES

- Available in White, Granite and Titanium
  - No drain required
  - Unique Float Valve Assembly
  - Contemporary design to suit any workplace
  - World class reliability and performance
  - Cup dispenser bracket and cover included
  - Stainless steel reservoirs
- PROUDLY AUSTRALIAN MADE**

## CONTACT

# AQUA COOLER®

## COLD WATER RESERVOIR

All dispensers have stainless steel tanks that hold approximately 1.8 litres of chilled water during normal usage. Each has a chilling capacity of 5 l.p.h. during peak periods.

## HOT WATER RESERVOIR

The stainless steel hot water tank is fitted with a high performance 575-watt band heater. This model delivers 50 cups (150ml) of hot water per hour at approximately ±90°C. Hot tanks have drains fitted for easy cleaning and sanitisation. It is very easy to remove for service if required. Each tank has its components swaged together. As no fusion welding is used, the occurrence of pitting, crevice or galvanic corrosion is prevented.

## REFRIGERATION

The system uses 40gms of R134a refrigerant, which is non-toxic, non-flammable and is environmentally friendly. A capillary tube, which has no moving parts, controls refrigerant flow.

## TEMPERATURE CONTROL

A factory pre-set thermostat controls the temperature of water in the cold tank. The water temperature in the hot tank is controlled by a mechanical thermostat set to approximately 85°C.

## COMPRESSOR

1/16 h.p. capacity 49 watts. The compressor is hermetically sealed for silent running.

## CONDENSER

All steel tube and wire construction.

## ELECTRICAL

240 volts, 50Hz. A 2 metre house cable and 3 pin plug are supplied.

## PERFORMANCE

To ARI 1010-94 Standard

## WEIGHT-PACKED

RP2 – 15kg  
RP3 – 16kg

## DIMENSIONS

Width - 370mm	Container Capacity
Depth - 320mm	20ft - 216 units
Height - 970mm	40ft - 430 units


## WARRANTY

Twelve months comprehensive coverage.  
Five years for compressor replacement



# RP SERIES

## POINT-OF-USE WATER COOLERS MAINS CONNECTED

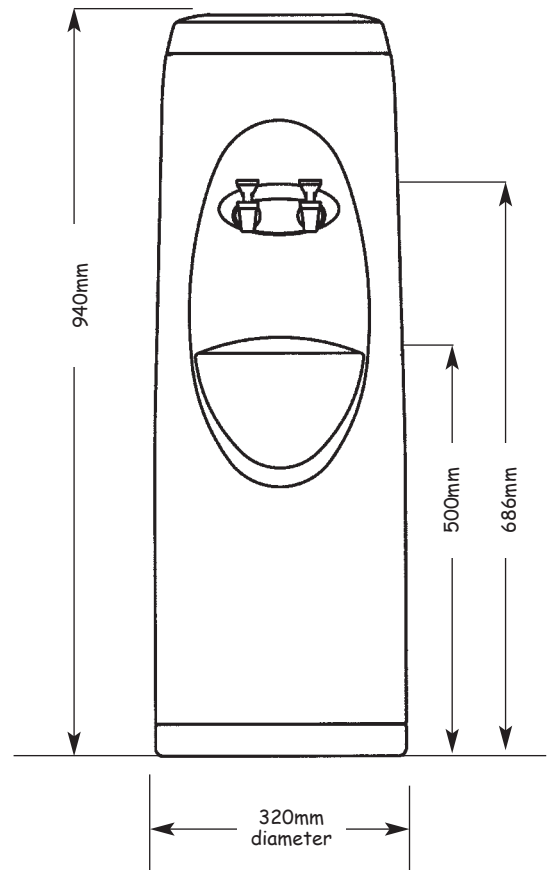

## Selection Chart

Filtered	Tap Outlet	White	Granite	Titanium
NO	Cook & Cold	RP2	RP2G	RP2T
	Hot & Cold	RP3	RP3G	RP3T
Yes	Cook & Cold	RP2F	RP2GF	RP2TF
	Hot & Cold	RP3F	RP3GF	RP3TF

## F.V.A.

### RELIABLE FLOAT VALVE ASSEMBLY

Designed to operate at water pressure ranging from 100 to 700 kPa this unique float valve assembly offers reliability and simplicity of service when needed. It needs only one connection to 1/2" Nylon tube and a "John Guest" fitting. Made from food grade plastic and stainless steel hardware this assembly will not taint the water at all. An air filter is included in the assembly to protect the water from contamination.